


Singer Pressure Relief Valve

Technical Guide W4.56

The Singer RPS Pressure Relief Control Valve opens quickly when the inlet pressure meets or exceeds a predetermined setting to relieve damaging overpressure.

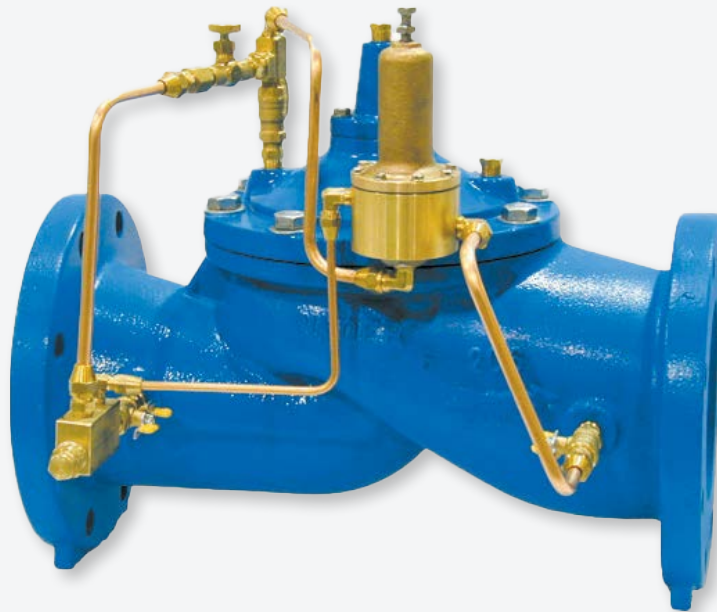

01.25 | W4.56 PRESSURE RELIEF VALVE

Applications

Potable water
Pressure Control
Municipal
Mining Applications
Irrigation Applications



Licence Number:
WMK/SMK26726

Product Attributes

Easily adjustable pressure setting
Accurately maintains pressure to set point
Quick opening relief
Smooth closing

Approvals/Standards

AS 5081:2008
Flanges to AS/NZS4087 Fig. B5
Coating complies with AS/NZS 4158

Quality

ISO 9001:2015 Quality
Management Systems

We are the supply partner of choice for New Zealand's civil construction industry, specialising in water and infrastructure based solutions.

The Pressure Relief Valve is mounted in a tee off the main pipeline and limits system pressure by relieving excess flow on overpressures above the set-point.

The 81-RP pilot senses the upstream pressure through a connection to the valve inlet. The valve and pilot remain closed until the inlet pressure exceeds the pilot setting. The valve opens rapidly to relieve damaging overpressure and closes smoothly at an adjustable speed, when the pressure returns below the set-point. The upstream pressure is limited to the pilot set-point.

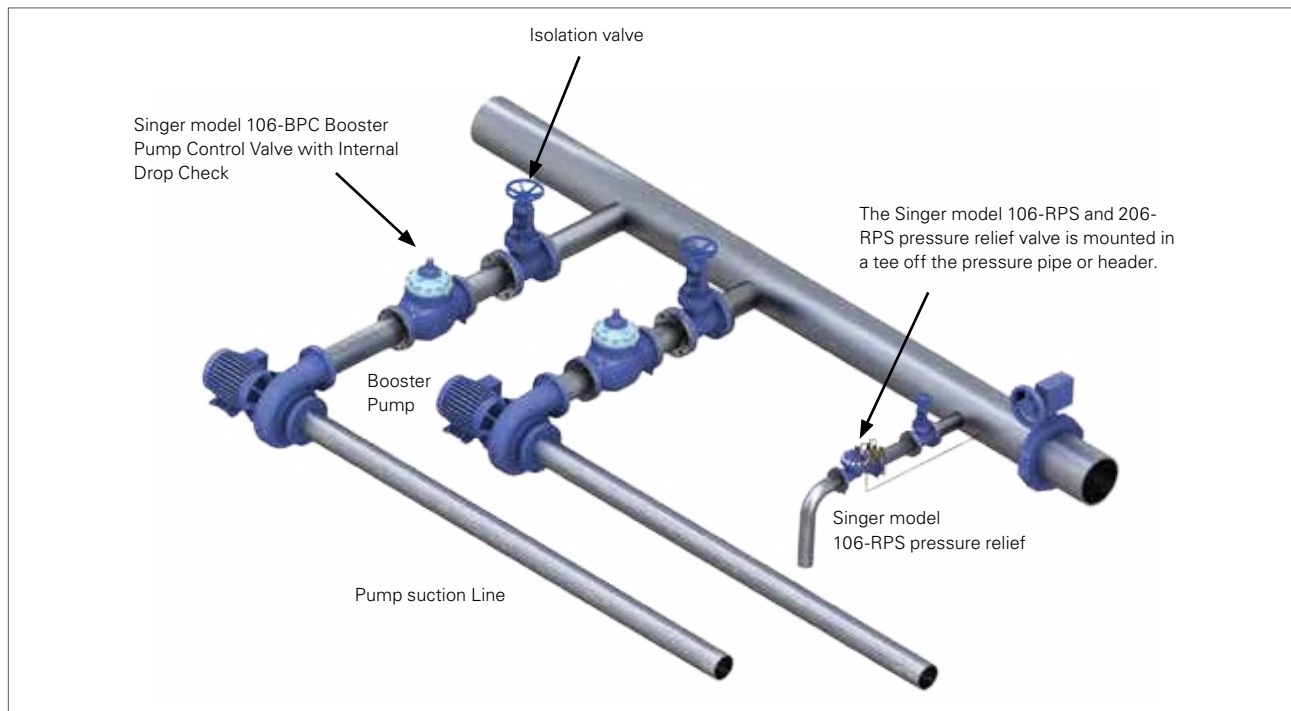


FIG. 1 Typical application

STANDARD MATERIALS

- Standard materials for pilot system components are:
- ASTM B62 bronze or ASTM B16 brass
- AISI 303/316 stainless steel trim
- Buna-N / EPDM diaphragm and seals

ORDERING INSTRUCTIONS

- Refer to the order form and ordering instructions.
- Additionally, include the following information for this product:
 - Single chamber (106), or (206)
 - Relief pressure range
 - Outlet pressure

SELECTION SUMMARY

1. Select the valve with sufficient capacity using the available pressure drop across the valve.
2. Usually operating in the momentary "M" service range.
3. For extended or continuous relief applications, use model 106-RPS-AC: Pressure Relief with Anti-Cavitation Cages.
4. Ensure that the maximum working pressure rating for the valve and for the flanges exceeds the maximum operating pressure.
5. Select a standard globe style body or the optional angle style body.

Sizing is ultimately determined by the specific application. Refer to Singer Control Valve Sizing Calculator on our website.

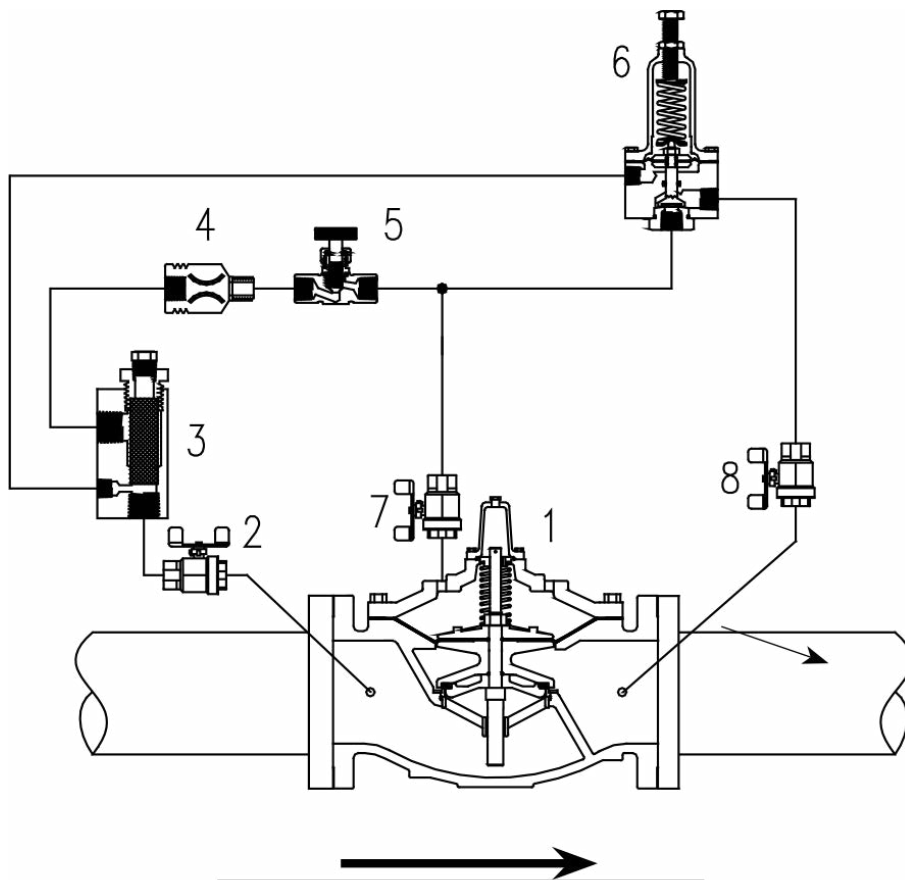


FIG. 2 Schematic A-0423F

SCHEMATIC DRAWING

1. Main Valve - 106-PG or 206-PG
2. Isolation Valve - standard 100 mm and larger
3. Strainer - standard 100 mm and larger
4. Fixed Restriction- 3.2 mm
5. Model 852-B Closing Speed Control
6. Model 81-RP pilot. Specify for:
 - 0.35 to 3.5 bar
 - 0.70 to 5.5 bar
 - 1.38 to 13.8 bar
 - 6.9 to 20.7 bar
7. Isolation Valve - standard 100 mm and larger
8. Isolation Valve - standard all sizes

TABLE 1 106- RPS Flow Capacity at 14 m/s

Code	Size (mm)	Momentary (L/s)
Indent	15	2
Indent	20	3
Indent	25	7
Indent	32	11
Indent	40	16
VC50RPS106S	50	30
Indent	65	42
VC80RPS106S	80	65
VC100RPS106S	100	114
VC150RPS106S	150	252
VC200RPS106S	200	442
VC250RPS106S	250	694
VC300RPS106S	300	1009
VC350RPS106S	350	1199
VC400RPS106S	400	1577
Indent	500	2461
Indent	600	3546
Indent	900	7868

TABLE 2 206- RPS Flow Capacity at 14 m/s

Code	Size (mm)	Momentary (L/s)
VC80RPS206S	80	36
VC100RPS206S	100	78
VC150RPS206S	150	136
VC200RPS106S	200	303
VC250RPS206S	250	530
VC300RPS206S	300	833
VC400RPS206S	400	1211
Indent	450	1893
Indent	500	1896
Indent	600 x 400	1899
Indent	600 x 500	2461
Indent	700	4255
Indent	750	4258
Indent	800	4261
Indent	900	4268
Indent	1000	3912

Branches Nationwide Support Office & Technical Services 0800 93 7473

Disclaimer: While every effort has been made to ensure that the information in this document is correct and accurate, users of Hynds product or information within this document must make their own assessment of suitability for their particular application. Product dimensions are nominal only, and should be verified if critical to a particular installation. No warranty is either expressed, implied, or statutory made by Hynds unless expressly stated in any sale and purchase agreement entered into between Hynds and the user.