

Single Chamber, Full Bore Main Control

Technical Guide W4.57

The Singer 106-PG full bore control valve is used as the basis for a large variety of control valve applications such as pressure, flow or level control. This hydraulically operated valve introduces or releases water from the control chamber above the diaphragm to effectively maintain accurate water control.



10.24 | W4.57 106 FULL BORE MAIN

Applications

Potable water
Pressure systems
Municipal
Mining Applications
Irrigation Applications



Licence Number:
WMK/SMK26726

Product Attributes

Versatile valve that can be configured for a variety of applications
Anti-cavitation option for high pressure drop situations
Available in globe and angle style

Approvals/Standards

AS 5081:2008
Flanges to AS/NZS 4087 Fig. B5
Coating complies with AS/NZS 4158

Quality

ISO 9001:2015 Quality Management Systems

We are the supply partner of choice for New Zealand's civil construction industry, specialising in water and infrastructure based solutions.

The heart of any Singer 106 Control Valve is the Ductile Iron 106-PG Full Bore Main Valve Body. These are hydraulically controlled to operate as pressure flow, or level control valves.

Selection

Automatic control valves operate by introducing or exhausting water from above the diaphragm at controlled rates. A pressure differential is required and is either inlet to outlet or inlet to atmosphere, depending on the application. Valves are sized to provide an appropriate pressure drop for each application. Most valves require a minimum of 0.7 bar pressure drop to operate. This applies mostly to valves that have the bonnet vented to downstream. With minimum of 0.35 bar downstream pressure, many valves can be made to open fully by venting the bonnet to atmosphere.

Our control valves are designed for use with clean potable water. Applications for other media are possible. Consult with Hynds Water.

Careful consideration of the possibility of cavitation must be given. Anti-cavitation trim is available to control the cavitation, reduce noise and prevent damage. Refer to Hynds Water for more details.

The 106-PG single chambered valve is the basic valve used in practically every model bearing the 106 description. The pilot systems are designed to meet the functional and performance requirements of specific applications. Sizing is ultimately determined by the specific application.

Refer to the Singer Control Valve Sizing Calculator on our website for assistance.

Schematic Drawing


1. Removable Stem Cap
2. ASTM A536 Ductile Iron Construction
3. Diaphragm EPDM
4. EPDM Resilient Disc
5. AISI 316 Stainless Steel Seat
6. AISI 316 Stainless Steel Stem
7. NSF 61 Fusion Bonded Epoxy Coating



FIG. 1 Alternative model A106-PG Angle



FIG. 2 Alternative model 106-PG THREADED

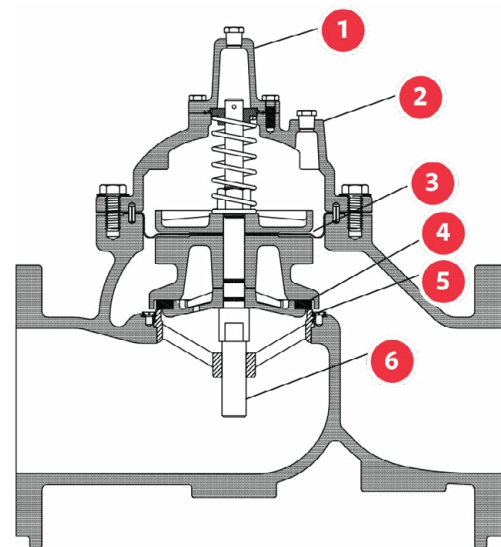

Available Options

Further customise the valve by adding any of the available options below.

Main Valve Options

Position Indicators (available for install during assembly or as a field modification)

- Model X107 stem mounted position indicators
- Model X129 limit switch assembly with Single Pole Double Throw limit switch (Double Pole Double Throw optional)
- Model X156 position transmitter (4 to 20 mA)
- Oxy-Nitride Stem
- Internal Drop Check
- External Spring Lift
- Grooved Ends
- Reclaimed Water

Pilots & Accessories, Materials of construction

Individual components can be upgraded from ductile iron, bronze and brass to stainless steel, for most sizes. Consult with us.

Model PGM

Provides a fully operational back-up system in the event of a diaphragm or pilot failure.

Anti-Cavitation Trim

Model 106-AC allows very high pressure drops in one valve, while retaining the standard 106 valve features.

Ordering Instructions

Refer to the order form and ordering instructions.

TABLE 1 Valve Styles and Sizes

Available Sizes	Ductile Iron		Stainless Steel	
	Threaded	Flanged	Threaded	Flanged
Globe	25-80mm	40-900mm	15-50mm	40-150mm
Angle	25-80mm	50-300mm, 400mm	N/A	N/A

TABLE 2 Valve Components

	Ductile Iron		Stainless Steel	
	Standard	Optional	Standard	Optional
1. Valve Body, Cover	65-45-12 Ductile Iron	-	316 Stainless Steel	-
2. Seat Ring	316 Stainless Steel	-	316 Stainless Steel	-
3. Disc Retainer	B16 Brass / B62 Bronze / A536 Ductile Iron	316 Stainless Steel	316 Stainless Steel	-
4. Stem	316 Stainless Steel	-	316 Stainless Steel	-
5. Stem Nut	B16 Brass	316 Stainless Steel	316 Stainless Steel	-
6. Spring	316 Stainless Steel	-	316 Stainless Steel	-
7. Guide Bushings	B16 Brass or SAE 660 Bronze	316 Stainless Steel	316 Stainless Steel	-
8. Diaphragm	EPDM	Buna-N / Viton (limited sizes)	EPDM	Buna-N / Viton (limited sizes)
9. Resilient Disc	EPDM	Buna-N / Viton (limited sizes)	EPDM	Buna-N / Viton (limited sizes)
10. Coating	NSF61 Approved Fusion Bonded Epoxy Thickness 250-350 microns in accordance to AS/NZS 4158	Consult factory	-	-
11. Fasteners	18-8 Stainless Steel	316 Stainless Steel	18-8 Stainless Steel	316 Stainless Steel

TABLE 3 106-PG Flow Capacity at 14m/s

Item Code	Size (mm)	Momentary (L/s)
Indent	15	2
Indent	20	3
Indent	25	7
Indent	32	11
Indent	40	16
VC50BODY106S	50	30
Indent	65	42
VC80BODY106S	80	65
VC100BODY106S	100	114
VC150BODY106S	150	252
VC200BODY106S	200	442
VC250BODY106S	250	694
VC300BODY106S	300	1009
VC350BODY106S	350	1199
VC400BODY106S	400	1577
Indent	500	2461
Indent	600	3546
Indent	900	7868

Branches Nationwide Support Office & Technical Services 0800 93 7473

Disclaimer: While every effort has been made to ensure that the information in this document is correct and accurate, users of Hynds product or information within this document must make their own assessment of suitability for their particular application. Product dimensions are nominal only, and should be verified if critical to a particular installation. No warranty is either expressed, implied, or statutory made by Hynds unless expressly stated in any sale and purchase agreement entered into between Hynds and the user.